



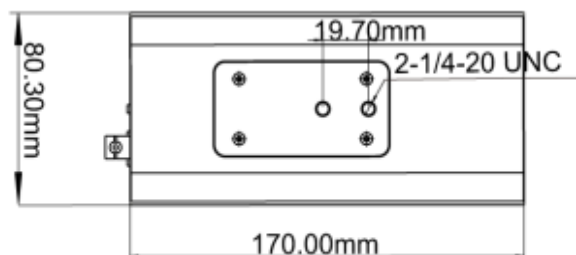

Features

- ※ H.265 video compression, dual stream
- ※ 2.14MP, 1/2.8" CMOS
- ※ Support various HD video formats
- ※ Has 3G-SDI output interface
- ※ 20X Optical zoom, 12X digital zoom
- ※ With OSD menu
- ※ With RS485 & RS232 control interface
- ※ Has image flip function
- ※ Has 5 buttons at back panel for easy configuration

Dimensional Drawing



Technical Specification

Model No.	ZC4-A2001N
Image Sensor	1/2.8" Exmor CMOS, 2.14MP
HD Signal Format	1080P/60,1080P/50,1080P/30,1080P/25,1080I/60,1080I/50; 720P/60,720P/50,720P/30,720P/25
Focal	f =4.7mm -94.0mm
IRIS	F1.6 - F3.5
Zoom	Optical: 20X, Digital: 12X
Field of View	59.5° - 2.9°
Focus	Auto, Manual, One push
Min.Illumination	0.5Lux(Color), 0.1Lux(B/W)
Shutter Speed	1/1 - 1/10,000s
AGC	Auto/Manual
White Balance	Auto, Indoor, Outdoor, One push, Manual, Auto Track,
AE Control	Auto, Manual, Shutter Priority, Iris Priority
WDR	Yes
BLC	Yes
S/N Ratio	Above 50dB
Noise Reduction	2D/3D
Preset Number	256
OSD	Yes
Image Flip	Yes
Network	
Max.Image Size	1920 x 1080
Frame Rate	HD:50Hz: 50fps(1920x1080) ; 60Hz:60fps(1920x1080)
Video Compression	H.265,H.264
Audio Compression	AAC
Protocol	HTTP,RTP,TCP,UDP,ONVIF,RTSP,RTMP
Dual Stream	Support
Simultaneous Users	Up to 10 Users
Interface	
Ethernet	RJ45,100M
Video Output	3G-SDI
Control Interface	RS-232,RS-485
General	
Protocol	VISCA and PELCO-D, PELCO-P
Spectra Address	1~7(VISCA),0-255(PELCO-D/PELCO-P)
Power Supply	DC12V
Power Consumption	<15W
Working Temp	0°C - +40°C
Storage Temp	-20°C - +60°C
Dimension	170mm x 80mm x 70mm
Weight	0.83KG
Color	Grey

Product specification are subject to change without notice